

# Preference®

## decorum series

NEW Frameless Design with Magnetically-Attached Grilles

Single Point Stereo, Dual voice coil, long-throw, Kevlar woofer w/ butyl surround  
Kapton, high-temperature voice coil formers, Dual 3/4" Teton tweeters, High-grade crossovers,  
Polyswitch overdrive protection, all-weather design, proven fast-mount system

### K-62d **Single Point Stereo**

6-1/2" 2-way round **frameless**

Frequency response: 42 Hz - 21kHz ± 3 dB

Power handling: 50 watts nom. 100 max.

Sensitivity: 90dB 1 watt / 1 meter

8 ohm nominal

Overall dimension: 8-7/16" dia.

Cut-out dimension: 7-1/4" dia. x 3-5/16" depth

### K-82d **Single Point Stereo**

8" 2-way round **frameless**

Frequency response: 35 Hz - 21kHz ± 3 dB

Power handling: 60 watts nom. 120 max.

Sensitivity: 91dB 1 watt / 1 meter


8 ohm nominal

Overall dimension: 9-7/8" dia.

Cut-out: 8-5/8" dia. x 3-7/8" depth



*K-62d & K-82d are sold and shipped individually*

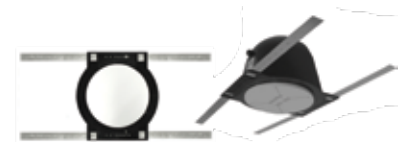

optional pre-construction  
bracket & vapor dome



supplied with  
round grilles



square grilles  
also available

View the entire  
Preference  
Product Line:



## Preference®

(775) 355-0405 + Fax: (775) 355-0646  
www.preference-audio.com + info@preference-audio.com  
Product materials & specifications are subject to change / improvement

