


Preference

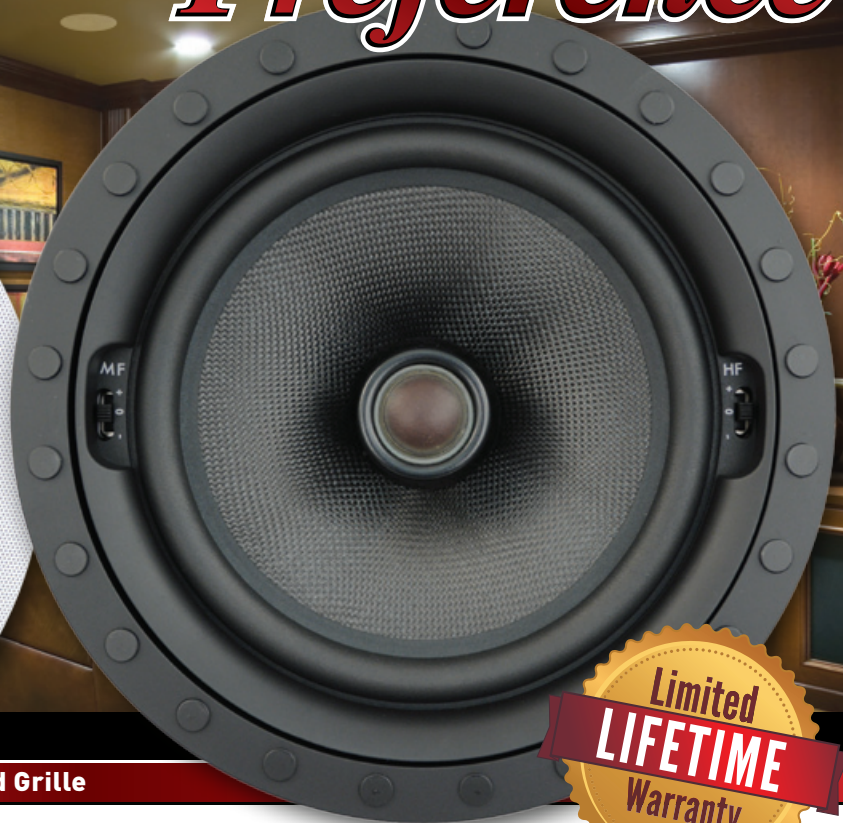

Limited
LIFETIME
Warranty

decorum series

NEW Frameless Design with Magnetically-Attached Grille

K-625d

6-1/2" 2-way In-Ceiling / Wall Loudspeaker

Frequency Response: 45Hz - 21kHz $\pm$ 3 dB

Power Handling: 50 watts nom. 100 max.

Sensitivity: 86dB 1 watt / 1 meter

Impedance: 8 ohms nominal

Tweeter: 1" Teton® soft dome pivoting tweeter

Cut-Out Dimensions: 7-1/4" dia. x 3-9/16" deep

Overall Dimensions: 8-7/16" diameter

Sold and shipped in pairs

Features:

- Baffle mounted mid & high frequency EQ switches
- Woven woofers made from genuine DuPont™ Kevlar®
- Magnetic, frameless, vibration-free, all-weather grille
- High temperature Polyimide voice coils



for K-625d



for K-825d

Optional Pre-Construction Brackets & Vapor Domes

DuPont™ and Kevlar® are trademarks or registered trademarks of E.I. du Pont de Nemours and Company.

K-825d

8" 2-way In-Ceiling / Wall Loudspeaker

Frequency Response: 35Hz - 21kHz $\pm$ 3 dB

Power Handling: 60 watts nom. 120 max.

Sensitivity: 91dB 1 watt / 1 meter


Impedance: 8 ohms nominal

Tweeter: 1" Teton® soft dome pivoting tweeter

Cut-Out Dimensions: 8-5/8" dia. x 3-7/8" deep

Overall Dimensions: 9-7/8" dia.

Sold and shipped in pairs

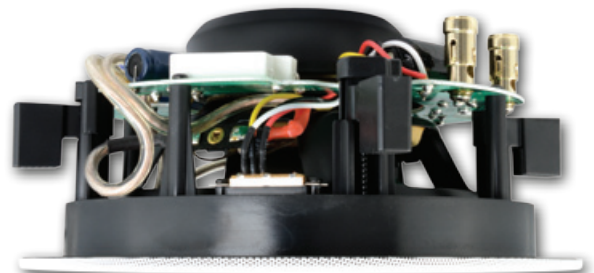

Optional Square Frameless Grilles

MGS-6f for
K-625d

MGS-8f for
K-825d



Rev. E

Preference®
(775) 355-0405 + Fax: (775) 355-0646
www.preference-audio.com + info@preference-audio.com

View the entire
Preference
Product Line:

